4/8/16 Channel Pentaplex Network DVR

MPEG-4, Graphic Interface, 480/120fps

The L500 Series combines advanced performance with easy operation and great value. It offers a whole new class of digital video recorders for CCTV applications. The intuitive graphic user interface and mouse navigation make the L500 easy to program and easy to use. The L500 is also network ready and comes complete with remote video management software and Lorex DDNS support.

GAS STATION

RETAIL



HOTELS

WAREHOUSE

FEATURES

- VGA and Composite video outputs for connection to any computer, CCTV or TV monitor
- Custom recording for each camera on the system
- Covert Camera Viewing
- Pre-Event Recording on Alarm
- 4 Programmable alarm Inputs
- 1 Alarm output: Relay
- Expandable internal storage with up to 1.5TB capacity
- Pan/Tilt/Zoom Camera Control: RS-485 interface
- Network Protocol: TCP/IP, DDNS and Web

LOREX®

www.lorexcctv.com

** Bandwidth dependant

4/8/16 Channel Pentaplex Network DVR

MPEG-4, Graphic Interface, 480/120fps

SPECIFICATIONS

Hard disk capacity	standard 320GB HDD (Max 750GBx2 bays), 100% duty cycle surveillance certified
Operating System	Real time operating system
Backup	HDD, USB (USB memory stick, USB HDD),DVD-RW, Network
Back-up file formats	AVI, JPG
Compression	MPEG4
Recording resolution speed	352x240 : 352x288 (NTSC/PAL) 120/100fps 704x240 : 704x288(NTSC/PAL) 60/50fps 704X480: 704x576(NTSC/PAL) 30/25fps
Record Scheduling	Daily, Weekly adjust specific Hr per channel
Pre/Post alarm recording	5 seconds (Pre); 3 minutes (Post), programmable per camera
Event/Log search	Up to 60M for user login/out, configuration changes, remote access, connects/disconnects
Playback	Single, Quad or 8 CH,16CH Simultaneous
Alarm inputs	4 programmable
Alarm outputs	1 x Relay with NO/NC contact; 30VDC/1A, 125VAC/0.5A resistive
Activity detection	12x12 grid(4CH), 16x16 grid(8,16CH), Sensitivity levels: 10
PTZ Control	RS-485 interface
Unit Weight	5.5KG, 12.1lbs
Unit Dimensions	14.0" -360mm X 15.2" - 389mm X 2.6" - 66mm (W X D X H)
Carton Weight	7.5 kg/16.5 lbs
Carton Dimensions	18.3" - 470mm X 18.3" - 470mm X 6.3" - 160mm (W X D X H)
Image size	3-5 Kbyte (352x240, 352x288), 5-10 Kbyte (704x240, 704x288) 6-16 Kbyte (704x480, 704x576)
Video inputs	4/8/16 x 1.0Vp-p, CVBS, 75ohms, BNC
Audio inputs	4 x line-in(4CH), 2 x line-in (8,16CH programmable), RCA sockets
Audio output	1 x line-out, RCA socket
Audio	2-way Audio conference (via network)
Supply voltage	100VAC-240VAC, 12VDC , 5A, 50/60Hz
Power consumption	Approx. 60 watts
Operating Temp. Range	32°~100° F / 0° ~ 45° C
Spot Out	1
Monitor Out	1
VGA	1

DIMENSIONS

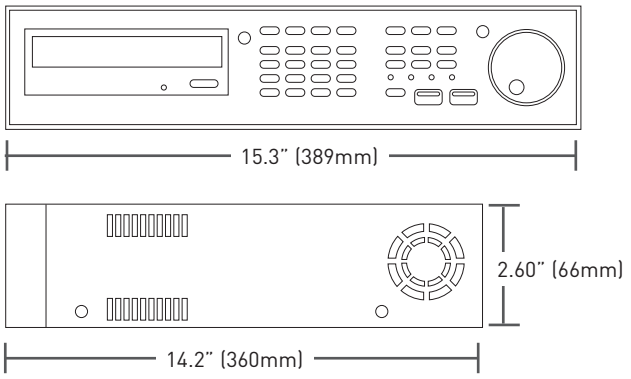

BACK JACK PANEL

4 Channel

8 Channel



16 Channel

PRODUCT INFORMATION

Model #:	L500 Series	
Description:	4/8/16 Channel Pentaplex Network DVR	
UPC:	L504321 L508321 L516321	7-78597-50432-3 7-78597-50832-1 7-78597-51632-6
Package Dimensions:	360mm w x 389mm h x 66mm d 14.0" w x 15.2" h x 2.6" d	
Package Weight:	7.5 kg / 16.5 lbs	

LOREX TECHNOLOGY INC.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada

3700 Koppers Street, Suite 100
Baltimore, Maryland 21227,
USA

©2007 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE